


DIN 24° MDL

Male DIN parallel. 24° inverted cone. Light series.

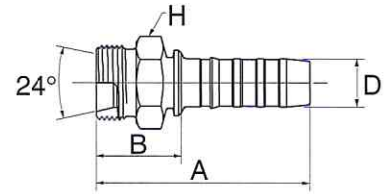


↔			🌀	↔	↔			🌀
D				A	B	H	REF.	
-size	DN	"		mm	mm	mm	GS	
-6	10	3/8	M18 x 1.5	60.0	24.2	19.0	6GS12MDL	
-8	12	1/2	M22 x 1.5	63.0	25.5	24.0	8GS15MDL	
-10	16	5/8	M26 x 1.5	76.5	26.2	27.0	10GS18MDL	
-12	20	3/4	M30 x 2.0	79.5	28.5	32.0	12GS22MDL	
-16	25	1	M36 x 2.0	90.0	33.2	41.0	16GS28MDL	
-24	40	1.1/2	M52 x 2.0	120.0	46.4	55.0	24GSP42MDL	

-6 to -16 size are 42.0 MPa (6000 psi).

DIN 24° FDHORX

Female DIN 'O' ring swivel. 24° cone. Heavy series.

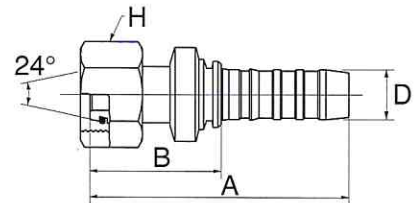

↔			🌀	↔	↔			🌀
D				A	B	H	REF.	
-size	DN	"		mm	mm	mm	GS	
-6	10	3/8	M20 x 1.5	73.0	37.2	24.0	6GS12FDHORX	
-6	10	3/8	M22 x 1.5	75.5	39.7	27.0	6GS14FDHORX	
-8	12	1/2	M22 x 1.5	76.5	38.9	27.0	8GS14FDHORX	
-8	12	1/2	M24 x 1.5	79.0	41.5	30.0	8GS16FDHORX	
-8	12	1/2	M30 x 2.0	82.0	44.5	36.0	8GS20FDHORX	
-10	16	5/8	M30 x 2.0	100.0	49.7	36.0	10GS20FDHORX	
-10	16	5/8	M36 x 2.0	104.0	53.7	46.0	10GS25FDHORX	
-12	20	3/4	M30 x 2.0	103.0	52.0	36.0	12GS20FDHORX	
-12	20	3/4	M36 x 2.0	107.4	56.4	46.0	12GS25FDHORX	
-12	20	3/4	M42 x 2.0	97.0	46.0	50.0	12GS30FDHORX	
-16	25	1	M36 x 2.0	116.0	59.6	46.0	16GS25FDHORX	
-16	25	1	M42 x 2.0	118.0	61.6	50.0	16GS30FDHORX	
-20	32	1.1/4	M52 x 2.0	145.0	73.9	60.0	20GS38FDHORX	
-24	40	1.1/2	M52 x 2.0	180.0	85.0	60.0	24GSH38FDHORX	
-24	40	1.1/2	M52 x 2.0	150.0	76.3	60.0	24GSP38FDHORX	

-6 to -20 size are 42.0 MPa (6000 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.