


## KOMATSU STYLE FEMALE - 45° ELBOW

FEMMINA 45° METRICA "KOMATSU" SV 60°  
 FEMELLE 45° MÉTRIQUE "KOMATSU" CÔNE 60°  
 DKM 45° "KOMATSU" 60° KONUS METRISCH  
 HEMBRA MÉTRICA A 45° "KOMATSU" CONO 60°

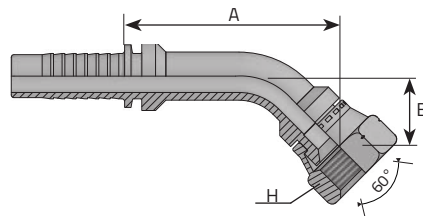

Code	Tube			Thread	Dimensions			Pressure			
	D.N.	Hose	Diam		T	t/1"	H	B	A	Bar	Psi
		Inch	mm		mm		mm	mm	mm		
F45K0414	-4	1/4"	6.4	M14 x 1.5	19	17	40	350	5076		
<b>F45K0416</b>	-4	<b>1/4"</b>	<b>6.4</b>	<b>M16 x 1.5</b>	<b>22</b>	<b>17</b>	<b>40</b>	<b>250</b>	<b>3626</b>		
F45K0516	-5	5/16"	7.9	M16 x 1.5	22	18.5	49.5	250	3626		
<b>F45K0614</b>	-6	<b>3/8"</b>	<b>9.5</b>	<b>M14 x 1.5</b>	<b>19</b>	<b>18</b>	<b>53</b>	<b>250</b>	<b>3626</b>		
F45K0616	-6	3/8"	9.5	M16 x 1.5	22	18	53	250	3626		
<b>F45K0618</b>	-6	<b>3/8"</b>	<b>9.5</b>	<b>M18 x 1.5</b>	<b>24</b>	<b>19</b>	<b>54</b>	<b>250</b>	<b>3626</b>		
F45K0818	-8	1/2"	12.8	M18 x 1.5	24	20	62	250	3626		
<b>F45K0820</b>	-8	<b>1/2"</b>	<b>12.8</b>	<b>M20 x 1.5</b>	<b>27</b>	<b>22</b>	<b>63</b>	<b>200</b>	<b>2901</b>		
F45K0822	-8	1/2"	12.8	M22 x 1.5	27	22	63	200	2901		
<b>F45K0824</b>	-8	<b>1/2"</b>	<b>12.8</b>	<b>M24 x 1.5</b>	<b>32</b>	<b>22</b>	<b>64</b>	<b>200</b>	<b>2901</b>		
F45K1022	-10	5/8"	16	M22 x 1.5	27	22	60	200	2901		
<b>F45K1024</b>	-10	<b>5/8"</b>	<b>16</b>	<b>M24 x 1.5</b>	<b>32</b>	<b>25</b>	<b>63</b>	<b>200</b>	<b>2901</b>		
F45K1230	-12	3/4"	19	M30 x 1.5	36	29	63	160	2320		
<b>F45K1633</b>	-16	<b>1"</b>	<b>25.4</b>	<b>M33 x 1.5</b>	<b>41</b>	<b>39.5</b>	<b>88.5</b>	<b>160</b>	<b>2320</b>		
F45K2036	-20	1.1/4"	31.8	M36 x 1.5	46	40	101	125	1813		
<b>F45K2442</b>	-24	<b>1.1/2"</b>	<b>38.1</b>	<b>M42 x 1.5</b>	<b>50</b>	<b>39</b>	<b>118</b>	<b>100</b>	<b>1450</b>		