


METRIC FEMALE 24° CONE - S TYPE (1)

FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S


* CRIMPED NUT
 DADO PINZATO

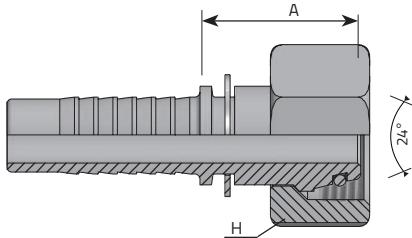

Code	Tube			Thread	Dimensions			Pressure		
	D.N.	Hose	Diam		T	D	H	Bar	Psi	
		Inch	mm							
FE0314S6	-3	3/16"	4.8	M14 x 1.5		6	19	25.5	420 6091	
FE0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	25.5	420	6091	
*	FE0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	25.5	450 6526	
	FE0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	26	450	6526
	FE0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	26	450 6526	
	FE0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	26	450	6526
	FE0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	26.5	350 5076	
	FE0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	26	350	5076
*	FE0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	26.5	450 6526	
	FE0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	26.5	450	6526
	FE0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	27	450 6526	
	FE0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	27.5	420	6091
	FE0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	32	420 6091	
	FE1030S20	-10	5/8"	16	M30 x 2	20	36	37	350	5076
	FE1230S20	-12	3/4"	9.5	M30 x 2	20	36	37.5	350 5076	

METRIC FEMALE 24° CONE - S TYPE (2)

FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

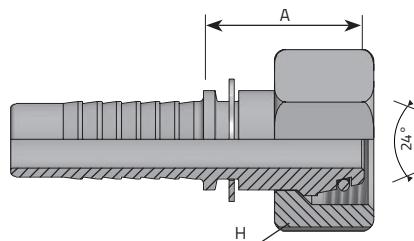

Code	Tube			Thread	Dimensions			Pressure	
	D.N.	Hose	Diam		D	H	A	Bar	Psi
			mm		mm	mm	mm		
FE1236S25	-12	3/4"	19	M36 x 2	25	46	38.5	350	5076
FE1636S25	-16	1"	25.4	M36 x 2	25	46	39.5	280	4061
FE1642S30	-16	1"	25.4	M42 x 2	30	50	40.5	280	4061
FE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	41.5	210	3046
FE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	47	210	3046
FE2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	47	185	2683