


**INTERLOCK METRIC FEMALE 24° CONE - S TYPE**

FEMMINA DIRITTA METRICA 24° DKOS CON O-RING  
 FEMELLE DROIT MÉTRIQUE AVEC O-RING CÔNE 24° - SÉRIE S  
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA RECTA MÉTRICA CON O-RING CONO 24° - SERIE S

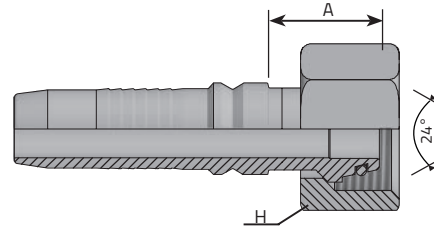

Code	Tube			Thread	Dimensions			Pressure		
	D.N.	Hose	Diam		T	D	H	A	Bar	Psi
	Inch		mm		mm	mm	mm	mm		
KFE1030S20	-10	5/8"	16	M30 x 2	20			420	6091	
KFE1230S20	-12	3/4"	19	M30 x 2	20	36	35	420	6091	
KFE1236S25	-12	3/4"	19	M36 x 2	25	46	36	420	6091	
KFE1636S25	-16	1"	25.4	M36 x 2	25	46	37	414	6004	
KFE1642S30	-16	1"	25.4	M42 x 2	30	50	38	280	4061	
KFE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	40	250	3626	
KFE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	45.5	250	3626	
KFE2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	45.5	250	3626	