


# Temperature Regulation Quick Connect Couplings






## Series ESDM Plug size 9.4 mm

### DN 6

Plug Profile (original size)



International Plug Profile



- One-hand quick connect couplings with small dimensions made of Brass MS 58
- For temperature regulation applications with hot or cold water as well as tempered oil
- Optional with straight-through, single or double shut-off valves
- Hose couplings available with standard stem profile for standard hoses or quick-fit profile for quick-fit hoses
- All couplings available with security lock, just add "S" on Type No. (Surcharge: 2.19 Euro gross)

#### Materials

- Body, valve body, valve: Brass MS 58 plain
- Sleeve, plug: Brass MS 58 plain/ nickel-plated
- Springs, retaining ring: Stainless steel 1.4310
- Balls: Stainless steel 1.4034
- Seals: FKM

Max. Working Pressure	Temperature	DN	Thread	Operation	Type of valve	Media	
PN 15 bar	-20°C – +200°C*	6	ISO 228 / DIN 13	One-hand	Single/double/straight-through	Tempered media	Coupl. 5 / Plug 10

#### Couplings with straight standard hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	51	17	22.5	9.4	5	40	ESDM 6 TL	ESDM 6 TLAB
Hose i.D. 9	51	17	22.5	9.4	6	45	ESDM 9 TL	
Hose i.D. 9	51	17	22.5	9.4	6	45		ESDM 9 TLAB
Hose i.D. 13	53	17	25	9.4	6	54	ESDM 13 TL	ESDM 13 TLAB

#### Couplings with straight quick-fit hose stem without/with valve

Hose connect.	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	56.5	17	28	9.4	5	40	ESDM 6 T	ESDM 6 TAB
Hose i.D. 10	56.5	17	28	9.4	6	46	ESDM 10 T	ESDM 10 TAB

#### Couplings with 45° standard hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	40.5	17	25.5	9.4	5	58	ESDM 6 TL-45	ESDM 6 TL-45AB
Hose i.D. 9	40.5	17	25.5	9.4	6	62	ESDM 9 TL-45	ESDM 9 TL-45AB

#### Couplings with 45° quick-fit hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	40.5	17	28	9.4	5	63	ESDM 6 T-45	ESDM 6 T-45AB
Hose i.D. 10	40.5	17	28	9.4	6	67	ESDM 10 T-45	ESDM 10 T-45AB

#### Couplings with 90° standard hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	40.5	17	25.5	9.4	5	58	ESDM 6 TL-90	ESDM 6 TL-90AB
Hose i.D. 9	40.5	17	25.5	9.4	6	62	ESDM 9 TL-90	ESDM 9 TL-90AB

#### Couplings with 90° quick-fit hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 6	40.5	17	28	9.4	5	63	ESDM 6 T-90	ESDM 6 T-90AB
Hose i.D. 10	40.5	17	28	9.4	6	67	ESDM 10 T-90	ESDM 10 T-90AB

#### Marking rings for easy and clear identification of quick-fit hose lines

Version	D	Colour	Weight	Type No.
For Hose i.D. 6	14	blue	50 0.3	AR-BL 6
For Hose i.D. 6	14	red	50 0.3	AR-RO 6
For Hose i.D. 6	14	yellow	50 0.3	AR-GE 6
For Hose i.D. 10	17	blue	50 0.5	AR-BL 10
For Hose i.D. 10	17	red	50 0.5	AR-RO 10
For Hose i.D. 10	17	yellow	50 0.5	AR-GE 10

To put on coupling or plug stem before assembling the quick-fit hose

Suitable hose clips, double-ear hose clips or crimping ferrules for standard hoses – (© page 194 - 197)

**Safety instruction:** Only use quick-fit hose stems in combination with suitable quick-fit hoses (up to max. 100°C)

\*subject to media (oil: 200°C, water: 150°C, air: 200°C)

# Temperature Regulation Quick Connect Couplings

Plug size 9.4 mm **Series ESDM**

**DN 6**


Plug Profile (original size)



## Couplings with straight male thread without/with valve (inner cone DIN 3863)


Thread connection	L	SW	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
G 1/4 m	46	17	17	9	9.4	6	60	ESDM 14 A	ESDM 14 AAB
G 3/8 m	46	19	17	9	9.4	6	70	ESDM 38 A	ESDM 38 AAB
M 10x1 m	44	17	17	7	9.4	6	60	ESDM 101 A	ESDM 101 AAB
M 14x1.5 m	46	17	17	9	9.4	6	60	ESDM 1415 A	ESDM 1415 AAB
M 16x1.5 m	46	19	17	9	9.4	6	70	ESDM 1615 A	ESDM 1615 AAB
G 1/4 m	50	17	17	13	9.4	6	61	ESDM 14 AL	ESDM 14 ALAB
G 3/8 m	50	19	17	13	9.4	6	75	ESDM 38 AL	ESDM 38 ALAB
M 14x1.5 m	50	17	17	13	9.4	6	65	ESDM 1415 AL	ESDM 1415 ALAB

Version AL with longer male thread mainly used for assembly with Ermeto fittings




## Couplings with 45° male thread without/with valve (inner cone DIN 3863)

Thread connection	L	SW	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
G 1/4 m	45	17	17	9	9.4	6	65	ESDM 14 A-45	ESDM 14 A-45AB
G 3/8 m	45	19	17	9	9.4	6	75	ESDM 38 A-45	ESDM 38 A-45AB
M 10x1 m	45	17	17	7	9.4	6	65	ESDM 101 A-45	ESDM 101 A-45AB
M 14x1.5 m	45	17	17	9	9.4	6	65	ESDM 1415 A-45	ESDM 1415A-45AB
M 16x1.5 m	45	19	17	9	9.4	6	75	ESDM 1615 A-45	ESDM 1615A-45AB



## Couplings with 90° male thread without/with valve (inner cone DIN 3863)

Thread connection	L	SW	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
G 1/4 m	45	17	17	9	9.4	6	75	ESDM 14 A-90	ESDM 14 A-90AB
G 3/8 m	45	19	17	9	9.4	6	85	ESDM 38 A-90	ESDM 38 A-90AB
M 10x1 m	45	17	17	7	9.4	6	75	ESDM 101 A-90	ESDM 101 A-90AB
M 14x1.5 m	45	17	17	9	9.4	6	75	ESDM 1415 A-90	ESDM 1415A-90AB
M 16x1.5 m	45	19	17	9	9.4	6	85	ESDM 1615 A-90	ESDM 1615A-90AB




## Couplings with straight female thread without/with valve

Thread connection	L	SW	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
G 1/4 f	40	17	17	9	9.4	6	50	ESDM 14 I	ESDM 14 IAB
G 3/8 f	40	21	17	9	9.4	6	54	ESDM 38 I	ESDM 38 IAB
M 10x1 f	40	17	17	9	9.4	6	50	ESDM 101 I	ESDM 101 IAB
M 14x1.5 f	40	17	17	9	9.4	6	50	ESDM 1415 I	ESDM 1415 IAB



## Couplings with plug DN 9 - ESDM and ESDM-ESHM System Adapters

Connection	L	D	L1	DS	Passage	Version	Weight	Type No. w/o valve	Type No. w valve
DN 6 - DN 9	50.5	17	15.5	9.4	6	straight	75	ESDMK-ESDS	ESDMK-ESDS-AB
DN 6 - DN 9	45	17	15.5	9.4	6	45°	80	ESDMK-ESDS-45	ESDMK-ESDS-45AB
DN 6 - DN 9	45	17	15.5	9.4	6	90°	80	ESDMK-ESDS-90	ESDMK-ESDS-90AB
DN 6 - DN 6	50	17	14	9.4	6	straight	70	ESDMK-ESHMS	ESDMK-ESHMS-AB
DN 6 - DN 9	50	17	14	9.4	6	straight	75	ESDMK-ESHS	ESDMK-ESHS-AB



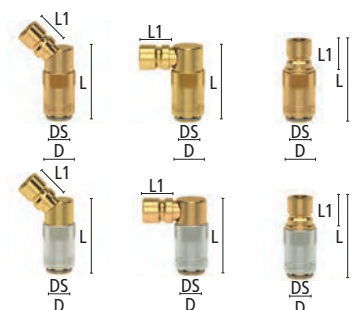


# Temperature Regulation Quick Connect Couplings

## Series ESDM Plug size 9.4 mm

### DN 6

Plug Profile (original size)



#### Diversion coupling for temperature regulation bridges for tube connection 90° with/without valve

Connection	L	D	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Tube 8/6	41	17	9.4	6	63	ESDM 8-U	ESDM 8-UAB

#### Tube (chamfered) for diversion couplings (temperature regulation tube), hardened brass

Connection	L	D	Passage	Weight	Type No.
Tube 8/6	250	8	6	45	TR 250-8
Tube 8/6	500	8	6	93	TR 500-8

#### Plain End Coupling

Connection	L	D	DS	Weight	Type No.
closed	30	17	9.4	37	ESDM-B

#### Plugs with straight standard hose stem without valve

Hose connection	L	D	L1	L2	DS	Passage	Weight	Type No.
Hose i.D. 6	39.5	12	22.5	10.5	9.4	5	9	ESDM 6 SL
Hose i.D. 9	39.5	12	22.5	10.5	9.4	6	13	ESDM 9 SL
Hose i.D. 13	39.5	15	22.5	10.5	9.4	6	17	ESDM 13 SL

#### Plugs with straight male thread without valve (inner cone DIN 3863)

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
G 1/8 m	22	11	8	10.5	9.4	6	10	ESDM 18 NA*
R 1/8 m	25	11	11	10.5	9.4	6	12	ESDM 18 NAR*
G 1/4 m	23	14	9	10.5	9.4	6	14	ESDM 14 NA*
R 1/4 m	26	14	12	10.5	9.4	6	16	ESDM 14 NAR*
G 3/8 m	23.5	17	9	10.5	9.4	6	18	ESDM 38 NA*
M 8x0.75 m	20.5	11	7	10.5	9.4	4.5	9	ESDM 875 NA
M 10x1 m	22	11	7	10.5	9.4	6	8	ESDM 101 NA
M 14x1.5 m	23	14	9	10.5	9.4	6	10	ESDM 1415 NA
M 16x1.5 m	23	17	9	10.5	9.4	6	18	ESDM 1615 NA

#### Plugs with straight female thread without valve

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
G 1/8 f	22	14	9	10.5	9.4	6	15	ESDM 18 NI*
G 1/4 f	23	17	9	10.5	9.4	6	19	ESDM 14 NI*
G 3/8 f	23	19	10	10.5	9.4	6	25	ESDM 38 NI*

\*Plugs with inch thread nickel-plated for simple distinction

# Temperature Regulation Quick Connect Couplings

Plug size 9.4 mm **Series ESDM**

**DN 6**

Plug Profile (original size)




## Plugs with 90° male thread without valve (metrical thread DIN 158/ R-thread DIN EN 10226)

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
R 1/8 m	27	15	9	10.5	9.4	6	35	ESDM 18 NA-90*
R 1/4 m	29	15	11	10.5	9.4	6	35	ESDM 14 NA-90*
R 3/8 m	30	17	12	10.5	9.4	6	35	ESDM 38 NA-90*
M 8x0.75 m	27	15	9	10.5	9.4	4.5	38	ESDM 875 NA-90
M 10x1 m	27	15	9	10.5	9.4	6	38	ESDM 101 NA-90
M 14x1.5 m	29	15	11	10.5	9.4	6	40	ESDM 1415 NA-90




## Plugs with straight male thread with valve

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
G 1/4 m	25.5	14	11	10.5	9.4	6	14	ESDM 14 NAAB*
R 1/4 m	28.5	14	14	10.5	9.4	6	18	ESDM 14 NARAB*
G 3/8 m	26.5	17	11	10.5	9.4	6	22	ESDM 38 NAAB*
M 14x1.5 m	25.5	15	11	10.5	9.4	6	15	ESDM 1415 NAAB




## Plugs with straight male long thread without valve (for length cutting as needed)

Thread connection	L	SW	L1	L2	L3	DS	Passage	Weight	Type No.
G 1/8 m	100	11	60	10.5	10	9.4	6	36	ESDM 18-60 NA
G 1/4 m	100	14	60	10.5	10	9.4	6	58	ESDM 14-60 NA
G 3/8 m	100	17	60	10.5	10	9.4	6	90	ESDM 38-60 NA
M 10x1 m	100	11	60	10.5	10	9.4	6	36	ESDM 101-60 NA
M 14x1.5 m	100	14	60	10.5	10	9.4	6	61	ESDM 1415-60 NA



## Plug Tubes for countersunk mould threads (for length cutting as needed)


D	L	SW	L1	L2	DS	Passage	Weight	Type No.
8	63	11	42	10.5	9.4	6	14	ESDM 68 R
8	100	11	79	10.5	9.4	6	20	ESDM 100 R
10	63	11	42	10.5	9.4	6	20	ESDM 63 R10
10	100	11	79	10.5	9.4	6	38	ESDM 100 R10
10	120	11	102	10.5	9.4	6	49	ESDM 120 R
10	240	11	222	10.5	9.4	6	102	ESDM 240 R
10	360	11	342	10.5	9.4	6	154	ESDM 360 R




NEW!  
NEW!

## Plug System Adapters

Connection	L	D	L1	L2	DS	DS1	Passage	Weight	Type No.
DN 6 – DN 6	27	10	10.5	10.5	9.4	9.4	6	14	ESDM-ESDM
DN 9 – DN 6	31	14	15.5	10.5	9.4	13.5	6	18	ESD-ESDM
DN 6 – DN 6	31	12	10.5	14	9	9.4	6	14	ESDM-ESHM
DN 6 – DN 9	31	14	10.5	14	13	9.4	6	18	ESDM-ESH



Protection cap (plastic) for plug profile ESDM  100 ESDM-K

\*Plugs with inch thread nickel-plated for simple distinction