




AIR-WATER - 20 bar

PAINTED STEEL

Ex ATEX directive II 3 GD c X

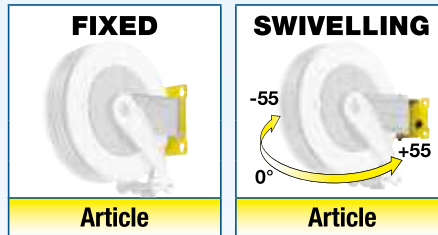

- Supplied with:
- hoses in black synthetic rubber
 - zinc plated steel couplings
 - brass swivel joint
 - "Viton®" seals



| | Article | Article | Hose supplied | Connection | |
|---|----------|----------|----------------------|------------|--------|
| | | | | inlet | outlet |
| S. 290 | 8290.100 | - | without hose | F3/8"G | F3/8"G |
| | 8290.101 | - | 10m - 3/8" (995.210) | F3/8"G | M3/8"G |
| | 8290.104 | - | 15m - 1/4" (993.215) | F3/8"G | M1/4"G |
| S. 330 | 8330.100 | - | without hose | F3/8"G | F3/8"G |
| | 8330.101 | - | 12m - 3/8" (995.211) | F3/8"G | M3/8"G |
| S. 390 | 8390.100 | 8380.100 | without hose | F3/8"G | F3/8"G |
| | 8390.102 | 8380.102 | 18m - 3/8" (995.217) | F3/8"G | M3/8"G |
| S. 430 | 8430.100 | 8420.100 | without hose | F1/2"G | F1/2"G |
| | 8430.101 | 8420.101 | 12m - 3/8" (995.212) | F1/2"G | M3/8"G |
| | 8430.102 | 8420.102 | 18m - 3/8" (995.218) | F1/2"G | M3/8"G |
| | 8430.103 | 8420.103 | 10m - 1/2" (996.210) | F1/2"G | M1/2"G |
| | 8430.104 | 8420.104 | 15m - 1/2" (996.215) | F1/2"G | M1/2"G |
| for ABS hose reels Series 430 see page 152 | | | | | |
| S. 530 | 8530.100 | 8520.100 | without hose | F1/2"G | F1/2"G |
| | 8530.101 | 8520.101 | 20m - 1/2" (996.220) | F1/2"G | M1/2"G |
| | 8530.102 | 8520.102 | 25m - 1/2" (996.225) | F1/2"G | M1/2"G |
| S. 540 | 8540.100 | 8550.100 | without hose | F1"G | F1"G |
| | 8540.101 | 8550.101 | 15m - 3/4" (997.215) | F1"G | M3/4"G |
| | 8540.102 | 8550.102 | 20m - 3/4" (997.220) | F1"G | M3/4"G |
| | 8540.103 | 8550.103 | 15m - 1" (998.215) | F1"G | M1"G |
| | 8540.105 | 8550.105 | without hose | F1/2"G | F1/2"G |
| S. 560 | 8560.106 | 8550.106 | 30m - 1/2" (996.230) | F1/2"G | M1/2"G |
| | 8560.100 | - | without hose | F1"G | F1"G |
| | 8560.101 | - | 30m - 3/4" (997.230) | F1"G | M3/4"G |
| | 8560.103 | - | 40m - 3/4" (997.240) | F1"G | M3/4"G |
| | 8560.104 | - | 20m - 1" (998.220) | F1"G | M1"G |
| | 8560.105 | - | 30m - 1" (998.230) | F1"G | M1"G |
| | 8560.106 | - | without hose | F1/2"G | F1/2"G |

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reels. The **template** supplied facilitates drilling of the holes and therefore hose reels fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reels installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

