



ART. 8540.405

Hose reels - s. 540-560

Fixed hose reel, s.540, for oil and similar, 150 bar,
without hose. Inlet-outlet G 1/2" (f)



FLUIDS

FRESH OIL | ANTIFREEZE

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND
ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING
FRESH OIL | ANTIFREEZE

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	150
Compatible fluids		oils and similar products
Swivel joint		zinc plated steel
Seals		polyurethane
Characteristic		fixed
Material		painted steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 1/2" (f)
Outlet		G 1/2" (f)
Reel flow path		zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



Overall dimensions

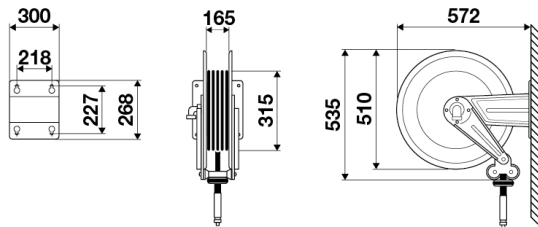

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.