



AIR-WATER - 20 bar

AISI 304 STAINLESS STEEL



FIXED




Article

8292.100
8292.101
8292.104

S. 290

SWIVELLING



Article

-
-
-


Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- "Viton®" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F3/8"G	F3/8"G
10m - 3/8" (995.210)	F3/8"G	M3/8"G
15m - 1/4" (993.215)	F3/8"G	M1/4"G
without hose	F3/8"G	F3/8"G
12m - 3/8" (995.211)	F3/8"G	M3/8"G
without hose	F3/8"G	F3/8"G
18m - 3/8" (995.217)	F3/8"G	M3/8"G
without hose	F1/2"G	F1/2"G
12m - 3/8" (995.212)	F1/2"G	M3/8"G
18m - 3/8" (995.218)	F1/2"G	M3/8"G
10m - 1/2" (996.210)	F1/2"G	M1/2"G
15m - 1/2" (996.215)	F1/2"G	M1/2"G
for ABS hose reels Series 430 see page 153		
without hose	F1/2"G	F1/2"G
20m - 1/2" (996.220)	F1/2"G	M1/2"G
25m - 1/2" (996.225)	F1/2"G	M1/2"G
without hose	F1"G	F1"G
15m - 3/4" (997.215)	F1"G	M3/4"G
20m - 3/4" (997.220)	F1"G	M3/4"G
15m - 1" (998.215)	F1"G	M1"G
without hose	F1/2"G	F1/2"G
30m - 1/2" (996.230)	F1/2"G	M1/2"G
without hose	F1"G	F1"G
30m - 3/4" (997.230)	F1"G	M3/4"G
40m - 3/4" (997.240)	F1"G	M3/4"G
20m - 1" (998.220)	F1"G	M1"G
30m - 1" (998.230)	F1"G	M1"G
without hose	F1/2"G	F1/2"G




FIXED OVERALL DIMENSIONS

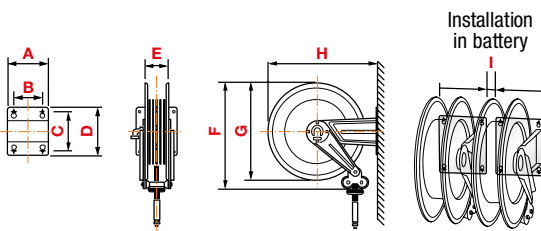

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg*
S. 290	186	140	196	226	110	310	300	320	-	0,037	from 7 to 12
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

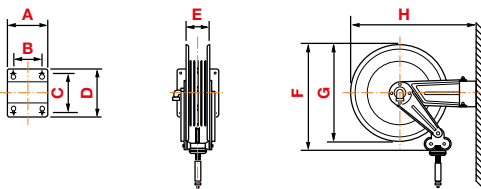

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



DIESEL FUEL - 10 bar

AISI 304 STAINLESS STEEL

FIXED



Article

Supplied with:

- hoses in antistatic black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- "Viton®" seals



ATEX directive
IIB 2 GD c T4 T135 °C X

Hose supplied	Connection	
	inlet	outlet



S. 540

8542.100	without hose	F1"G	F1"G
8542.601	15m - 3/4" (997.815)	F1"G	M3/4"G
8542.602	20m - 3/4" (997.820)	F1"G	M3/4"G
8542.603	15m - 1" (998.815)	F1"G	M1"G

S. 560

8562.100	without hose	F1"G	F1"G
8562.603	40m - 3/4" (997.840)	F1"G	M3/4"G
8562.604	20m - 1" (998.820)	F1"G	M1"G
8562.605	30m - 1" (998.830)	F1"G	M1"G

