


- CONTENT
- AIR & WATER
- AIR CONDITION
- BRAKE
- BREATHING
- BUNKER
- CHEMICAL
- COOLANT
- FOOD
- FUEL
- GAS
- HYDRAULIC
- MATERIAL HANDLING
- OIL
- OIL COOLING
- POWERSTEERING
- PVC
- STEAM
- WELDING & GAS
- INDEX

Codan 3320 Air / Water Hose

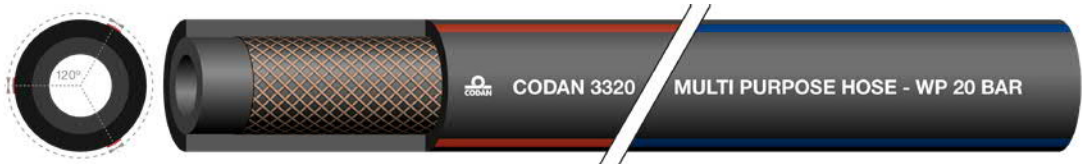

Codan 3320 - EN ISO 8031: 1997

Black, flexible universal hose for air and water. Available with either blue or red stripes. Electrically conductive liner prevent the build-up of static electricity; $R < 10^6 \Omega$ in accordance with EN ISO 8031: 1997.

High-quality EPDM inside and outside ensures good weather and ozone resistance in any environment. For use in industrial applications for cold and hot water, compressed air and chemicals (acids excepted). Resistant to acetates and ketones. Please contact Codan for further information.

Type nr. 3320

Application: Air / Water Hose

Standard Length: 50 metres

Working Temperature: -40°C to 95°C

Inside: EPDM

Colour: Black

Reinforcement: PVA

Outside: EPDM

Colour: Black

Standards: EN ISO 8031: 1997

Std. branding: -

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
6,0	13,0	20	60	40	150	3320006000
8,0	15,0	20	60	50	180	3320008000
10,0	17,0	20	60	60	210	3320010000
13,0	21,0	20	60	80	300	3320013000
16,0	24,0	20	60	100	350	3320016000
19,0	28,0	20	60	115	470	3320019000
25,0	35,0	20	60	150	670	3320025000