

# Wand Nozzle




**Water<sup>®</sup>  
Profi**  
by **LUDECKE**

- Adjustable wand nozzle with one-hand operation and spray head up to 60 l flow rate
- Sophisticated dispensing system using slide valve technology
- Various spray heads, tube lengths and connectors
- Soft and comfortable handle
- Sieve in handle protects against dirt
- For commercial landscaping and private gardens, tree nurseries, etc.

## Materials:

- Body: Brass MS 58 and aluminium galvanic nickel-plated
- Slide valve: Brass galvanic nickel-plated
- Casting tube, spray head: Aluminium
- Seals: FKM
- Handle: Soft PVC
- Plug: Brass MS 58 nickel-plated
- Claw coupling: Brass CW617N


Max. Working Pressure	Temperature	Thread	Media	
PN 16 bar	up to +95°C	ISO 228	Water	1

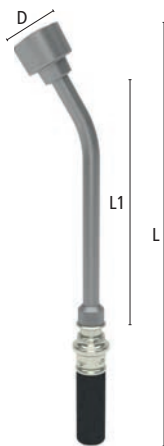

## Wand Nozzle with female thread G 3/4" - ISO 228

Thread connection	L	D	L1	Ø Bores	Type No.
G 3/4 f	600	30	400	1.0	GG 403010 34I
G 3/4 f	800	30	600	1.0	GG 603010 34I
G 3/4 f	1100	30	900	1.0	GG 903010 34I
Thread connection	L	D	L1	Ø Bores	Type No.
G 3/4 f	600	52	400	0.7	GG 405207 34I
G 3/4 f	800	52	600	0.7	GG 605207 34I
G 3/4 f	1100	52	900	0.7	GG 905207 34I
Thread connection	L	D	L1	Ø Bores	Type No.
G 3/4 f	600	52	400	1.0	GG 405210 34I
G 3/4 f	800	52	600	1.0	GG 605210 34I
G 3/4 f	1100	52	900	1.0	GG 905210 34I


Slide valve can be regreased if necessary

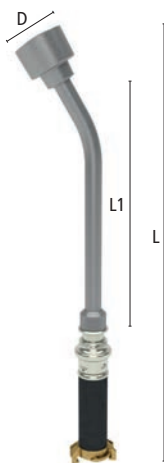

## Wand Nozzle with Claw Coupling

Connection	L	D	L1	Ø Bores	Type No.
Claw Coupling	600	30	400	1.0	GG 403010 GKA
Claw Coupling	800	30	600	1.0	GG 603010 GKA
Claw Coupling	1100	30	900	1.0	GG 903010 GKA
Connection	L	D	L1	Ø Bores	Type No.
Claw Coupling	600	52	400	0.7	GG 405207 GKA
Claw Coupling	800	52	600	0.7	GG 605207 GKA
Claw Coupling	1100	52	900	0.7	GG 905207 GKA
Connection	L	D	L1	Ø Bores	Type No.
Claw Coupling	600	52	400	1.0	GG 405210 GKA
Claw Coupling	800	52	600	1.0	GG 605210 GKA
Claw Coupling	1100	52	900	1.0	GG 905210 GKA

Slide valve can be regreased if necessary

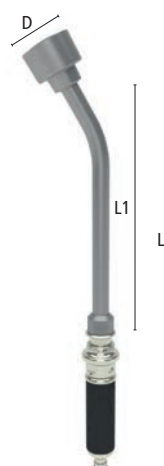

## Wand Nozzle with Plug WPN DN 9

Connection	L	D	L1	Ø Bores	Type No.
Plug WPN DN 9	600	30	400	1.0	GG 403010 WS
Plug WPN DN 9	800	30	600	1.0	GG 603010 WS
Plug WPN DN 9	1100	30	900	1.0	GG 903010 WS
Connection	L	D	L1	Ø Bores	Type No.
Plug WPN DN 9	600	52	400	0.7	GG 405207 WS
Plug WPN DN 9	800	52	600	0.7	GG 605207 WS
Plug WPN DN 9	1100	52	900	0.7	GG 905207 WS
Connection	L	D	L1	Ø Bores	Type No.
Plug WPN DN 9	600	52	400	1.0	GG 405210 WS
Plug WPN DN 9	800	52	600	1.0	GG 605210 WS
Plug WPN DN 9	1100	52	900	1.0	GG 905210 WS

Slide valve can be regreased if necessary

# Wand Nozzle



**Water<sup>®</sup>  
Profi**  
by **LUDECKE**




## Handle with slide valve for Wand Nozzle

Thread connection	L	D	L1	L2		Weight	Type No.
G 3/4 f - G 3/4 m	182	40	8	22	1	348	GG HS

Slide valve can be regreased if necessary


## Spray Head - small version

Thread connection	L	D	Ø Bores		Weight	Type No.
G 3/4 f	35	30	1.0	5	33	GGK 3010



## Spray Head - large version

Thread connection	L	D	Ø Bores		Weight	Type No.
G 3/4 f	51	52	0.7	5	55	GGK 5207
G 3/4 f	51	52	1.0	5	61	GGK 5210




## Casting Tube

Thread connection	L		Weight	Type No.
G 3/4 m - G 3/4 f	400	1	75	GGR 400-34
G 3/4 m - G 3/4 f	600	1	120	GGR 600-34
G 3/4 m - G 3/4 f	900	1	166	GGR 900-34



## WaterProfi Claw Coupling with male thread

Thread connection	L	B	L1	Passage		Weight	Type No.
G 3/4 m	32	53.5	10.5	20	10	100	GKA 34



## WaterProfi Plug with male thread (Series WPN DN 9)

Thread connection	L	SW	L1	L2		Weight	Type No.
G 3/4 m	41	30	10.5	24	5	76	WPN 34 NA



## Screwing hose stems for hose connection

Thread connect.	Hose connect.	L	L1	L2	Passage		Weight	Type No.
G 3/4 m	Hose i.D. 13	31	22.5	9	10	5	30	WPN 13 GT
G 3/4 m	Hose i.D. 16	31	22.5	9	13	5	31	WPN 16 GT
G 3/4 m	Hose i.D. 19	31	22.5	9	15	5	40	WPN 19 GT
G 3/4 m	Hose i.D. 25	31	22.5	9	19	5	48	WPN 25 GT



## Sieve

Resistance	L	D	D1	Material	Temp°C	Media	Colour	Shore A		Weight	Type No.
Water	9	25	16	NBR	up to +95	Water	black	70°	10	4	GG-SIEB 34



## O-ring for female thread

Resist.	Con.	L	D	D1	Material	Temp°C	Media	Colour	Shore A		Weight	Type No.
Water	3/4 f	2	26	18	EPDM	up to +95	Water	black	65°	100	1	GDRG 34

