




**ZEC S.p.A.**  
Via Lungolorno 11 - 42052 Colorno (PR) - Italia  
Tel. 0521 816631 - Fax 0521 816772  
info@zecspa.com - www.zecspa.com

Capitale sociale: Euro 1.000.000  
C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348  
Numero REA: PR - 173914

## JC8 Series Thermoplastic hose - Water-proof Cover\*

- WORKING PRESSURE FROM 250 BAR/3.600 PSI TO 345 BAR/5.000 PSI
- SUPER SLIDING AND ABRASION RESISTANT
- LOW VOLUMETRIC EXPANSION AND PRESSURE LOSSES
- HIGH OPERATING SPEED AND FLOATATION

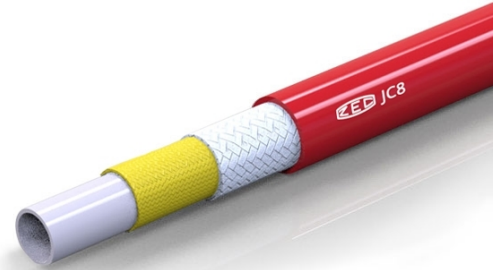

HIGH PRESSURE



WATER

## TECHNICAL FEATURES

Metric

| Code      | ID    |      |    | OD   | 1,25<br>WP | R MIN | g   | Ferrule Code |
|-----------|-------|------|----|------|------------|-------|-----|--------------|
|           | inch  | mm   | DN |      |            |       |     |              |
| JC867105  | 1/2"  | 13.0 | 12 | 22.4 | 345        | 100   | 292 | BP12JC7      |
| JC887105  | 3/4"  | 19.2 | 19 | 29.8 | 250        | 120   | 460 | BP34JC7      |
| JC897105  | 1"    | 25.6 | 25 | 37.3 | 250        | 150   | 643 | BP1JC7       |
| JC8107105 | 1"1/4 | 32.0 | 32 | 46.0 | 250        | 235   | 985 | BP114MTKHM   |

## TECHNICAL FEATURES

### Reels length:

80-100-120-150-180-200-250 m

### Technical-constructive features:

Inner core in thermoplastic polymer, reinforcement in high tenacity textile fiber double braid and outside covering in antiabrasion polyurethane, pinpricked, stabilized to UV rays and resistant to hydrolysis for outdoor applications, in environments having high humidity and saline levels.

### Applications:

The JC8 Series hoses have been created for water applications in the high pressure cleaning field.

### Working temperature:

from -40°C to +55°C from -40°F to +131°F

### Working pressure:

Safety ratio 1:2,5

**\*The water-proof feature of the cover means that the hose is especially suitable for wet and saline environments where there are extreme temperature changes**