


## Rubber matting

### Hurricane Eco wide rib

Finish: one side wide rib, other side fabric finish  
 Temperature range: -30° to +70°C

**Features:** strong and abrasion resistant • Equipped with non slip ribbing on the top  
 • Not oil resistant

**Application:** very versatile applicable for indoor • For example as a protective mat, loading floor or in stables

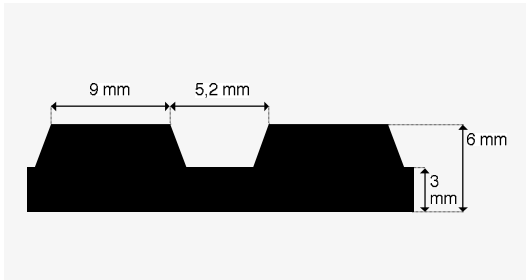

		Test method
Specific gravity grs/cm <sup>3</sup>	1,50	DIN 53508
Hardness shore A ± 5°	70	DIN 53505
Tensile strength Mpa	3	DIN 53504
Elongation at break %	200	DIN 53504
Compression set at 70°C for 22 hours %	20	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Colour	Quality	Article no.
5	0	1,00	10	black	SBR	BR65SX 5/0-1
5	0	1,20	10	black	SBR	BR65SX 5/0-1,2
6	0	1,00	10	black	SBR	BR65SX 6/0-1
6	0	1,20	10	black	SBR	BR65SX 6/0-1,2