


Rubber matting

Freya block rib

Finish: one side flat block rib, other side fabric finish
 Temperature range: -30° to +70°C

Features: strong and abrasion resistant • Equipped with non slip ribbing on the top

Application: very wide range of applications

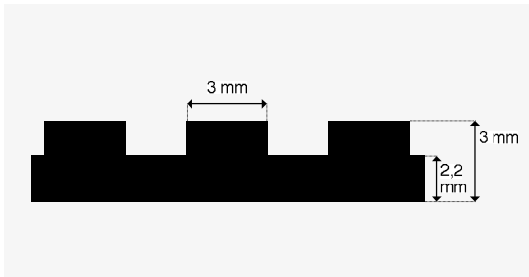

		Test method
Specific gravity grs/cm ³	1,45	DIN 53508
Hardness shore A ± 5°	65	DIN 53505
Tensile strength Mpa	3,5	DIN 53504
Elongation at break %	250	DIN 53504
Abrasion mm ³	300	DIN 53516
Compression set at 70°C for 22 hours %	35	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Colour	Quality	Article no.
3	0	1,20	10	Black	SBR	LS65 3/0