



WATER MAX 130 °C* - 100 bar

AISI 304 STAINLESS STEEL

Ex ATEX directive
IIB 2 GD c T4 T135 °C X

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals



Article	Article
8332.400	-
8332.201	-
8333.202	-

Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.313)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

Article	Article
8392.200	8382.200
8392.202	8382.202
8393.201	8383.201

without hose	F1/2"G	F3/8"-1/2"G
17m - 3/8" (995.318)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

Article	Article
8434.200	8424.200
8432.201	8422.201
8432.202	8422.202
8433.202	8423.202

without hose	F1/2"G	F1/2"G
10m - 1/2" (996.311)	F1/2"G	M1/2"G
15m - 1/2" (996.316)	F1/2"G	M1/2"G
15m - 1/2" (996.415)	F1/2"G	M1/2"G

for ABS hose reels Series 430 see page 153

Article	Article
8534.200	8524.200
8532.201	8522.201
8533.202	8523.202

without hose	F1/2"G	F1/2"G
20m - 1/2" (996.321)	F1/2"G	M1/2"G
25m - 1/2" (996.425)	F1/2"G	M1/2"G

Article	Article
8544.200	8554.200
8542.202	8552.202
8542.203 *	8552.203 *
8543.202	8553.202

without hose	F1"G	F1"G
20m - 3/4" (997.320)	F1"G	M3/4"G
15m - 1" (998.315)	F1"G	M1"G
20m - 3/4" (997.420)	F1"G	M3/4"G

Article	Article
8564.200	-
8562.205 *	-

without hose	F1"G	F1"G
30m - 1" (998.330)	F1"G	M1"G


* 50 bar

* 50 bar




* Effective temperature only for versions without hose. For the maximum temperature of the versions with hose, contact technical dept.

FIXED OVERALL DIMENSIONS

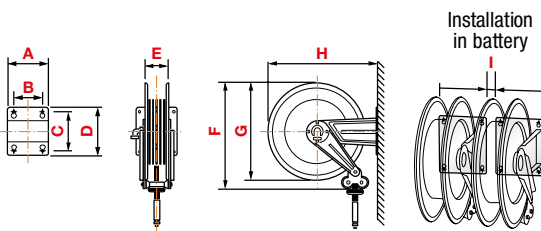

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

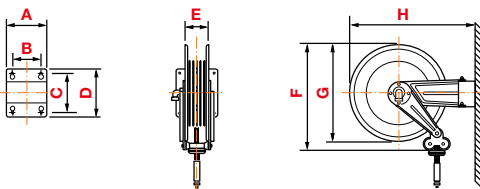

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.