

The original




New colours: DN 6, now available in Green and Yellow

CARWASH COMFORT – now also available in green and yellow

- High standard of easy and comfortable use in combination with spraying equipment, e.g. brush lance.
- Light weight, 92 g/m at DN 6. More than half in weight in comparison to an usual self-service hose.
- Chemically resistant, smooth interior made out of PES.
- Transparent surface made out of a thermoplastic elastomer, depending on colour: CCBL, CCRT, CCGR, CCGE, CCGN.
- Oil-, UV-, ozone-resistant and weatherproof.
- Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F.
- High-tensile polyester reinforcing, working pressure of up to 200 bar, with a fourfold guarantee, that the hose does not burst.
- Diameter 12 mm, burst pressure > 800 bar.

flexible at low temperatures,
oil-, UV-, ozone-resistant and weatherproof!
Excellent gliding characteristic!

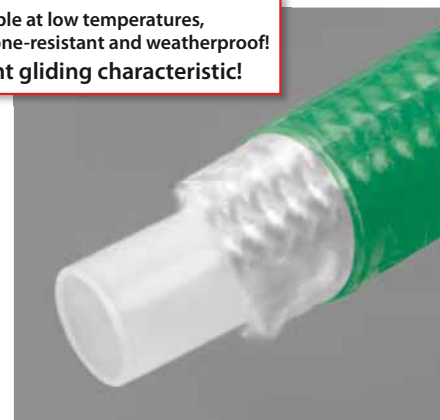

Composition: PES, polyester and elastomer

CARWASH COMFORT. DN 6. Per metre

R+M Nr.	colour
300 100 6	blue
300 110 6	grey
300 120 6	red
300 140 6	green
300 150 6	yellow

new



Smooth cover: clean and excellent gliding characteristic in combination with wetness



R+M Nr.	length
461 052 603 5	3,5 m
461 052 603 7	3,7 m
461 052 604	4,0 m
461 052 604 2	4,2 m
461 052 604 5	4,5 m
461 052 604 7	4,7 m
461 052 605 0	5,0 m
461 052 605 5	5,5 m
461 052 606 0	6,0 m

R+M Nr.	length
461 054 603 5	3,5 m
461 054 603 7	3,7 m
461 054 604	4,0 m
461 054 604 2	4,2 m
461 054 604 5	4,5 m
461 054 604 7	4,7 m
461 054 605	5,0 m
461 054 605 5	5,5 m
461 054 606	6,0 m

R+M Nr.	length
461 072 603 5	3,5 m
461 072 603 7	3,7 m
461 072 604	4,0 m
461 072 604 2	4,2 m
461 072 604 5	4,5 m
461 072 604 7	4,7 m
461 072 605	5,0 m
461 072 605 5	5,5 m
461 072 606	6,0 m

R+M Nr.	length
461 076 603 5	3,5 m
461 076 603 7	3,7 m
461 076 604	4,0 m
461 076 604 2	4,2 m
461 076 604 5	4,5 m
461 076 604 7	4,7 m
461 076 605 0	5,0 m
461 076 605 5	5,5 m
461 076 606 0	6,0 m

R+M Nr.	length
461 044 603 5	3,5 m
461 044 603 7	3,7 m
461 044 604	4,0 m
461 044 604 2	4,2 m
461 044 604 5	4,5 m
461 044 604 7	4,7 m
461 044 605 0	5,0 m
461 044 605 5	5,5 m
461 044 606 0	6,0 m

Grey. Plastic hose bend restrictor black



R+M Nr.	length
462 052 303 5	3,5 m
462 052 303 7	3,7 m
462 052 304	4,0 m
462 052 304 2	4,2 m
462 052 304 5	4,5 m
462 052 304 7	4,7 m
462 052 305 0	5,0 m
462 052 305 5	5,5 m
462 052 306 0	6,0 m




R+M Nr.	length
462 054 303 5	3,5 m
462 054 303 7	3,7 m
462 054 304	4,0 m
462 054 304 2	4,2 m
462 054 304 5	4,5 m
462 054 304 7	4,7 m
462 054 305	5,0 m
462 054 305 5	5,5 m
462 054 306	6,0 m

R+M Nr.	length
462 072 303 5	3,5 m
462 072 303 7	3,7 m
462 072 304	4,0 m
462 072 304 2	4,2 m
462 072 304 5	4,5 m
462 072 304 7	4,7 m
462 072 305	5,0 m
462 072 305 5	5,5 m
462 072 306	6,0 m

R+M Nr.	length
462 076 303 5	3,5 m
462 076 303 7	3,7 m
462 076 304	4,0 m
462 076 304 2	4,2 m
462 076 304 5	4,5 m
462 076 304 7	4,7 m
462 076 305 0	5,0 m
462 076 305 5	5,5 m
462 076 306 0	6,0 m

R+M Nr.	length
462 044 303 5	3,5 m
462 044 303 7	3,7 m
462 044 304	4,0 m
462 044 304 2	4,2 m
462 044 304 5	4,5 m
462 044 304 7	4,7 m
462 044 305 0	5,0 m
462 044 305 5	5,5 m
462 044 306 0	6,0 m

Red. Plastic hose bend restrictor black




R+M Nr.	length
463 052 303 5	3,5 m
463 052 303 7	3,7 m
463 052 304	4,0 m
463 052 304 2	4,2 m
463 052 304 5	4,5 m
463 052 304 7	4,7 m
463 052 305 0	5,0 m
463 052 305 5	5,5 m
463 052 306 0	6,0 m

R+M Nr.	length
463 054 303 5	3,5 m
463 054 303 7	3,7 m
463 054 304	4,0 m
463 054 304 2	4,2 m
463 054 304 5	4,5 m
463 054 304 7	4,7 m
463 054 305	5,0 m
463 054 305 5	5,5 m
463 054 306	6,0 m

R+M Nr.	length
463 072 303 5	3,5 m
463 072 303 7	3,7 m
463 072 304	4,0 m
463 072 304 2	4,2 m
463 072 304 5	4,5 m
463 072 304 7	4,7 m
463 072 305	5,0 m
463 072 305 5	5,5 m
463 072 306	6,0 m

R+M Nr.	length
463 076 303 5	3,5 m
463 076 303 7	3,7 m
463 076 304	4,0 m
463 076 304 2	4,2 m
463 076 304 5	4,5 m
463 076 304 7	4,7 m
463 076 305 0	5,0 m
463 076 305 5	5,5 m
463 076 306 0	6,0 m

R+M Nr.	length
463 044 303 5	3,5 m
463 044 303 7	3,7 m
463 044 304	4,0 m
463 044 304 2	4,2 m
463 044 304 5	4,5 m
463 044 304 7	4,7 m
463 044 305 0	5,0 m
463 044 305 5	5,5 m
463 044 306 0	6,0 m



R+M Nr.	length
464 052 303 5	3,5 m
464 052 303 7	3,7 m
464 052 304 0	4,0 m
464 052 304 2	4,2 m
464 052 304 5	4,5 m
464 052 304 7	4,7 m
464 052 305 0	5,0 m
464 052 305 5	5,5 m
464 052 306 0	6,0 m

R+M Nr.	length
464 054 303 5	3,5 m
464 054 303 7	3,7 m
464 054 304 0	4,0 m
464 054 304 2	4,2 m
464 054 304 5	4,5 m
464 054 304 7	4,7 m
464 054 305 0	5,0 m
464 054 305 5	5,5 m
464 054 306 0	6,0 m

R+M Nr.	length
464 072 303 5	3,5 m
464 072 303 7	3,7 m
464 072 304 0	4,0 m
464 072 304 2	4,2 m
464 072 304 5	4,5 m
464 072 304 7	4,7 m
464 072 305 0	5,0 m
464 072 305 5	5,5 m
464 072 306 0	6,0 m

R+M Nr.	length
464 076 303 5	3,5 m
464 076 303 7	3,7 m
464 076 304 0	4,0 m
464 076 304 2	4,2 m
464 076 304 5	4,5 m
464 076 304 7	4,7 m
464 076 305 0	5,0 m
464 076 305 5	5,5 m
464 076 306 0	6,0 m

R+M Nr.	length
464 044 303 5	3,5 m
464 044 303 7	3,7 m
464 044 304 0	4,0 m
464 044 304 2	4,2 m
464 044 304 5	4,5 m
464 044 304 7	4,7 m
464 044 305 0	5,0 m
464 044 305 5	5,5 m
464 044 306 0	6,0 m

Green. Plastic hose bend restrictor black



R+M Nr.	length
465 052 303 5	3,5 m
465 052 303 7	3,7 m
465 052 304 0	4,0 m
465 052 304 2	4,2 m
465 052 304 5	4,5 m
465 052 304 7	4,7 m
465 052 305 0	5,0 m
465 052 305 5	5,5 m
465 052 306 0	6,0 m

R+M Nr.	length
465 054 303 5	3,5 m
465 054 303 7	3,7 m
465 054 304 0	4,0 m
465 054 304 2	4,2 m
465 054 304 5	4,5 m
465 054 304 7	4,7 m
465 054 305 0	5,0 m
465 054 305 5	5,5 m
465 054 306 0	6,0 m

R+M Nr.	length
465 072 303 5	3,5 m
465 072 303 7	3,7 m
465 072 304 0	4,0 m
465 072 304 2	4,2 m
465 072 304 5	4,5 m
465 072 304 7	4,7 m
465 072 305 0	5,0 m
465 072 305 5	5,5 m
465 072 306 0	6,0 m


R+M Nr.	length
465 076 303 5	3,5 m
465 076 303 7	3,7 m
465 076 304 0	4,0 m
465 076 304 2	4,2 m
465 076 304 5	4,5 m
465 076 304 7	4,7 m
465 076 305 0	5,0 m
465 076 305 5	5,5 m
465 076 306 0	6,0 m

R+M Nr.	length
465 044 303 5	3,5 m
465 044 303 7	3,7 m
465 044 304 0	4,0 m
465 044 304 2	4,2 m
465 044 304 5	4,5 m
465 044 304 7	4,7 m
465 044 305 0	5,0 m
465 044 305 5	5,5 m
465 044 306 0	6,0 m



Long foam dream: ideally used at foam brushes

High-tensile strength:
diameter 15 mm,
polyester reinforcing and
surface cover made of
thermoplastic elastomer



The hang of it:
CARWASH COMFORT DN 8
convinces by an excellent
bending behaviour



CARWASH COMFORT blue. Rubber hose bend restrictor blue. DN 8. 220 bar / 3200 PSI. -40 °C – +60 °C, -40 °F – +140 °F



Female thread (DKR)

Female thread (DKR)

Female thread (DKL/DKOL)

Female thread (DKL/DKOL)

Male thread (AGR)

R+M Nr.	length
471 052 603 5	3,5 m
471 052 603 7	3,7 m
471 052 604 0	4,0 m
471 052 604 2	4,2 m
471 052 604 5	4,5 m
471 052 604 7	4,7 m
471 052 605 0	5,0 m
471 052 605 5	5,5 m
471 052 606 0	6,0 m

R+M Nr.	length
471 054 603 5	3,5 m
471 054 603 7	3,7 m
471 054 604 0	4,0 m
471 054 604 2	4,2 m
471 054 604 5	4,5 m
471 054 604 7	4,7 m
471 054 605 0	5,0 m
471 054 605 5	5,5 m
471 054 606 0	6,0 m

R+M Nr.	length
471 072 603 5	3,5 m
471 072 603 7	3,7 m
471 072 604 0	4,0 m
471 072 604 2	4,2 m
471 072 604 5	4,5 m
471 072 604 7	4,7 m
471 072 605 0	5,0 m
471 072 605 5	5,5 m
471 072 606 0	6,0 m

R+M Nr.	length
471 076 603 5	3,5 m
471 076 603 7	3,7 m
471 076 604 0	4,0 m
471 076 604 2	4,2 m
471 076 604 5	4,5 m
471 076 604 7	4,7 m
471 076 605 0	5,0 m
471 076 605 5	5,5 m
471 076 606 0	6,0 m

R+M Nr.	length
471 044 603 5	3,5 m
471 044 603 7	3,7 m
471 044 604 0	4,0 m
471 044 604 2	4,2 m
471 044 604 5	4,5 m
471 044 604 7	4,7 m
471 044 605 0	5,0 m
471 044 605 5	5,5 m
471 044 606 0	6,0 m

CARWASH COMFORT. DN 8. Per metre

R+M Nr.	colour
300 100 8	blue