



ART. 8530.4000

Double inlet-outlet hose reels

Fixed hose reel, s.530, for oil and similar, 150 bar, without hose. Arrangement for double inlet-outlet. Inlet G 3/8" (f), outlet G 3/8" (m)



FLUIDS

FRESH OIL | PAINT

SECTORS

CLEANING | MANUFACTURING INDUSTRY | SHIPPING AND OFFSHORE

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

| Features | UM | Value |
|---------------------|-------|-------------------------------|
| Pressure | bar | 150 |
| Compatible fluids | | oil - paints |
| Swivel joint | | 2 painted steel swivels joint |
| Seals | | polyurethane |
| Characteristic | | fixed |
| Material | | painted steel |
| Couplings | | - |
| Hose | | - |
| Ø and hose length | Ø - m | - |
| Inlet | | G 1/2" (f) |
| Outlet | | G 3/8" (m) |
| Reel flow path | | zinc plated steel |
| Internal drum width | mm | 104 |

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

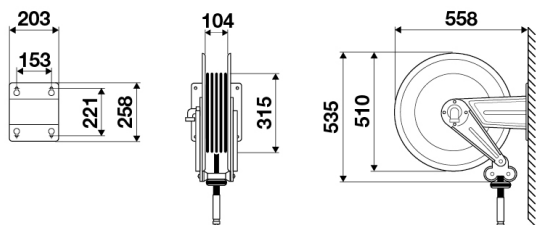

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.